

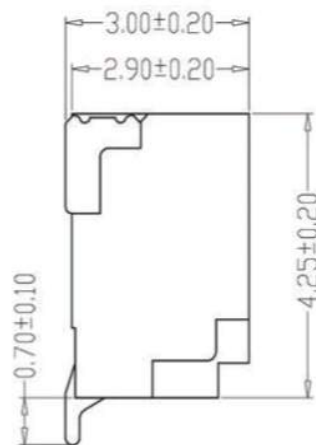
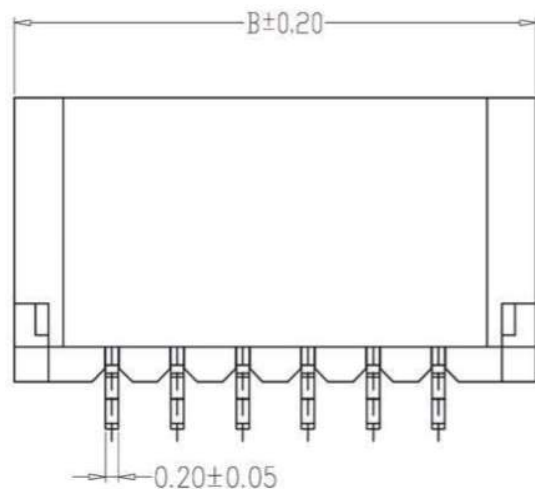


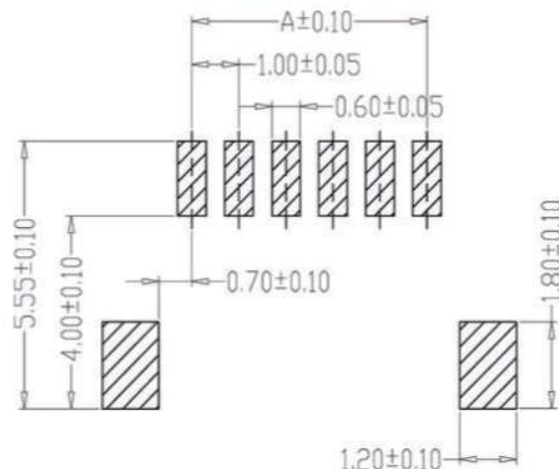

Model: KH-A1001WF- (02-20) A

SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 50V AC, DC
- 3、Temperatuer Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $100\text{M}\Omega$ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material: Wafer Nylon 6T, UL94V-0
PIN Phosphoric bronze Tin-plated
Solder tad Phosphoric bronze Tin-plated

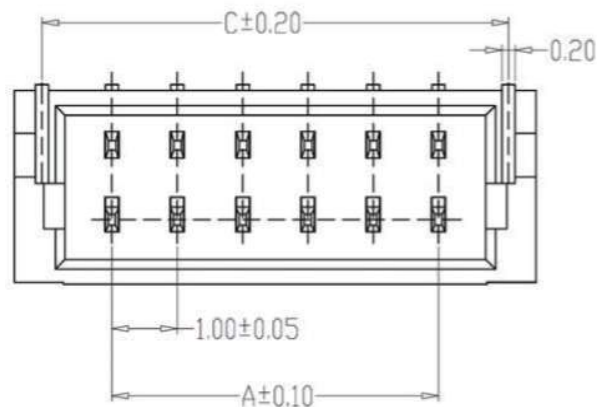

PCB LAYOUT

NO.	mm		
	A	B	C
A1001WF-02A	1.00	4.00	3.20
A1001WF-03A	2.00	5.00	4.20
A1001WF-04A	3.00	6.00	5.20
A1001WF-05A	4.00	7.00	6.20
A1001WF-06A	5.00	8.00	7.20
A1001WF-07A	6.00	9.00	8.20
A1001WF-08A	7.00	10.00	9.20
A1001WF-09A	8.00	11.00	10.20
A1001WF-10A	9.00	12.00	11.20
A1001WF-11A	10.00	13.00	12.20
A1001WF-12A	11.00	14.00	13.20
A1001WF-20A	19.00	22.00	21.20

DRAWN	DESCRIPTION	DATE	GENERAL TOLERANCE		DRAWING			PART NO.			REV.	A
			X. ± 0.25	X. $^{\circ} \pm 2^{\circ}$	CHECK	2013、07、01			1.0 SMT WAVE SMT TYPE		SHEET	1/1
			.X ± 0.20	.X $^{\circ} \pm 1^{\circ}$	APPROVAL	2013、07、03		TITLE				
			.XX ± 0.15	.XX $^{\circ} \pm 0.5^{\circ}$		2013、07、05		CUTM. NO.				
			.XXX ± 0.10	.XXX $^{\circ} \pm 0.5^{\circ}$	UNITS	MM	SCALE	1:1	SHENZHEN KINGHELM ELECTRONIC CO., LTD.		WWW.BDS666.COM	
									KH-A1001WF-03A		0755-83044319	