
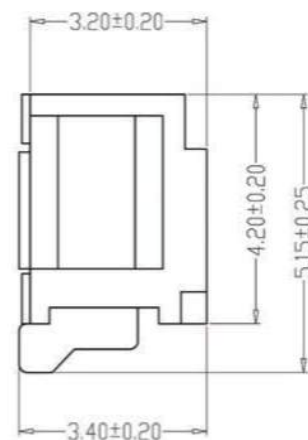




Kinghelm®

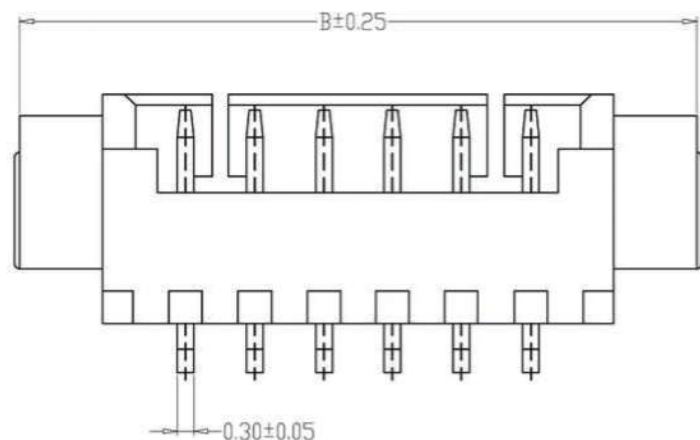

Model: KH-A1251WF- (02-20) A

SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 125V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 100MΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material:Wafer Nylon46, UL94V-0
PIN Brass Tin-plated
Solder tad Brass Tin-plated

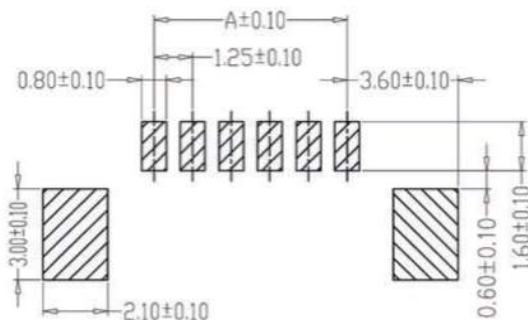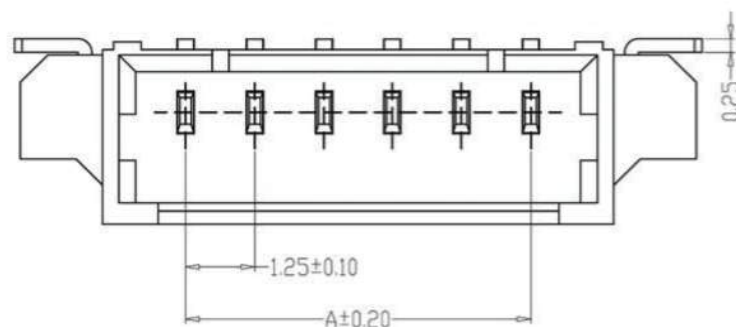

PCB LAYOUT

NO.	mm	
	A	B
A1251WF-02A	1.25	7.35
A1251WF-03A	2.50	8.60
A1251WF-04A	3.75	9.85
A1251WF-05A	5.00	11.10
A1251WF-06A	6.25	12.35
A1251WF-07A	7.50	13.60
A1251WF-08A	8.75	14.85
A1251WF-09A	10.00	16.10
A1251WF-10A	11.25	17.35
A1251WF-11A	12.50	18.60
A1251WF-12A	13.75	19.85
A1251WF-20A	23.75	29.85

DRAWN	DESCRIPTION	DATE	GENEERL TOLERANCE		DRAWING	2013、07、01	PART NO.			REV.	A
			X. ±0.25	X. ° ±2°	CHECK	2013、07、03	TITLE	1.25 SMT	WAFE SMT TYPE	SHEET	1/1
			.X ±0.20	.X ° ±1°	APPROVAL	2013、07、05	CUTM. NO.				
			.XX ±0.15	.XX ° ±0.5°	UNITS	MM	SCALE	1:1	SHENZHEN KINGHELM ELECTRONIC CO., LTD.		WWW.BDS666.COM
			.XXX ±0.10	.XXX ° ±0.5°			KH-A1251WF-02A		0755-83044319		