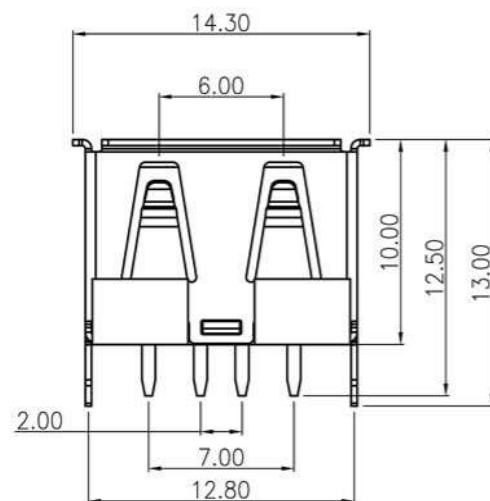

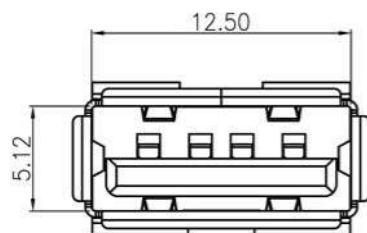


91-US01-XXX

Remark

Electrical Specifications:

Contact Resistance: |
30 mΩ (Max))Insulation Impedance:
1000 KΩ (Min)Withstanding Voltage:
500V AC 1minute

Materials:

Rubber Core:

PBT

Terminal:

Brass C2680

Housing:

Brass C2680/SPCC

Electroplating:

Terminal:

Contact area gold-plating 1 μ",
Soldering area Tin flash 100-200μ"

Housing:

Whole-area copper backing 40-60μ",
Whole-area nickel plating 60-70μ"432: PBT WHITE, Copper housing
433: PBT Black, Copper housingTOLERANCE UNLESS
OTHERWISE SPECIFIED
.XXX ±0.10
.XX ±0.25
.X ±0.35
.X' ±3'

PART NAME:

USB AF 10.0 180 Crimping

PART NO:

See Table

C

SHENZHEN KINGHELM
ELECTRONIC CO., LTD.

WWW.BDS666.COM

KH-AF180ZJ-10-JB

0755-83044319

REV:

DESCRIPTION

REV BY

APPROVED


DATE

MATL:

SEE SPECIFICATION

APPROVED

PROJECTION:

THIRD ANGLE
PROJECTION

CHECKED

UNIT:

SCALE

REV(NO)

SHEET

DRAWN

Hexing

mm

1:1

A

1 OF 1

DATE

2011.12.05