


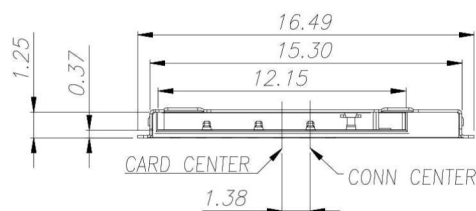
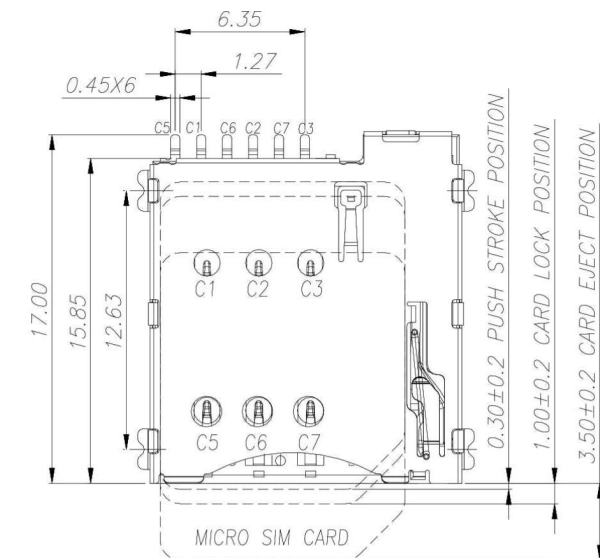


Kinghelm®

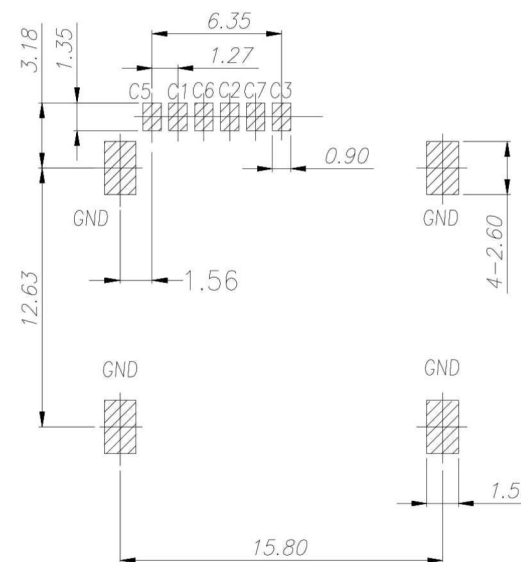

MICRO SIM CARD

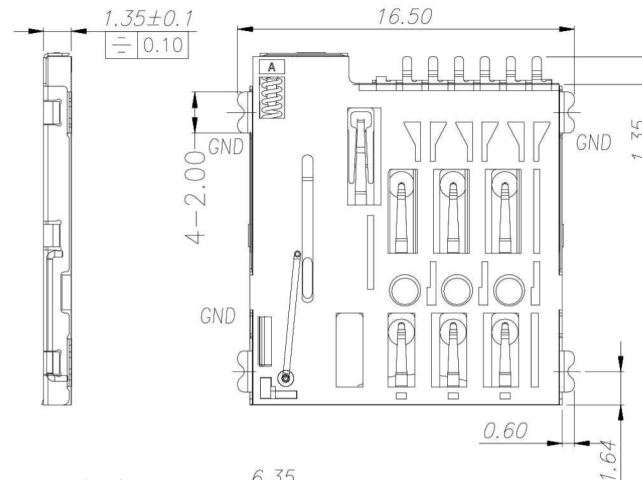

SIM pin Assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

NOTES:

MATERIAL:

Insulator: High Temperature Thermoplastic,UL 94V-0.
Contact: Copper Alloy
Shell: STAINLESS

PLATING:

Contact: Plated 30u'' Ni Overall Contact Au 1U
Shell: Plated 30u'' Ni Overall
Plated 1u''Au Selective Contact Area

Electrical:

Current Rating :0.5mA AC/DC max.
Voltage Rating :125V AC/DC
Ambient Temperature Range :-20° C~+60° C
Storage Temperature Range :-40° C~+70° C
Ambient Humidity Range :95% R.H. Max.
Contact Resistance:100mΩmax.
Insulation Resistance:1000MΩmin./500VDC
Mating Cycles:10000 Insertions
Temperature: 260° C ±5°

SHENZHEN KINGHELM ELECTRONIC
CO., LTD.

WWW.BDS666.COM

KH-SIM1616-6PIN

0755-83044319



DATE 2014/5/27

TOLERANCE UNSPECIFIED

X. ±0.30 X. ±3°

.X ±0.25 .X ±2°

.XX ±0.20 .XX ±1°

.XXX ±0.05 .XXX ±0.5°

TITLE

MICRO SIM PUSH 6P

PART NUMBER

C3P206J2640

DRAWING NUMBER

INIT
mm

SCALE

1:1
SHEET

1/1

DESIGNED
Luo Zhengfu

CHECKED
Luo Libin

APPROVED

Zhang Huayu

■ CIRCUIT TRACE KEEP OUT AREA
■ SMT SOLDER AREA

THERE SHOULD NOT BE ANY CIRCUITRIES
IN THE LAYOUT SPACE OF THE PRODUCTS.

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

