


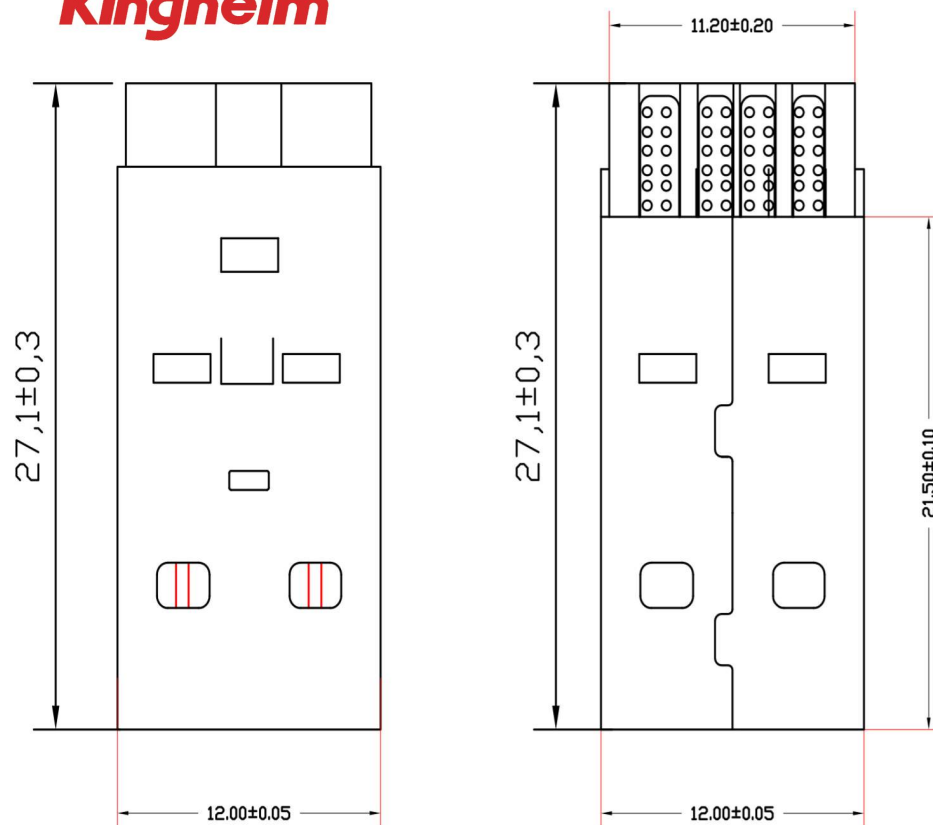

USB-AM SOLDER TAIL

: Specifications

Electrical:

Contact Resistance

30milliohms MAX

Dielectric Withstanding Voltage

500V DC AT sea LevoL

Insulation Resistance:

100MEGA ohms MIN

Material:

Housing:Hing Temperature Thermoplastics,

Contact:Copper Alloy

Shell:SPCC-SD

Finish:

Contact: Plated Gold in Mating Area;

Tin/Lead On Solder Tails

Shell:


Tin/Lead Plating

Ordering Informating

X-5-XX

contact plating
01-Gold Flash
02-1-3u"Gold/Tin
03-30u"Gole/Tin

X
Plastic Color
A=Black

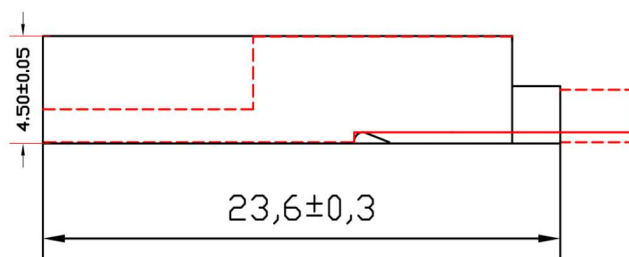

NO.	Part Name	Material	Quantity	Remark
1	Shell	SPCC or Brass 12.00mm	1	See Order Information
2	Housing	Thermoplastic PBT	1	See Order Information
3	Contact	12.00mm 0.50mm		Gold Plating on Contact And Tin on Tail

SHENZHEN KINGHELM ELECTRONIC CO., LTD.		WWW.BDS666.COM		(Unit) :MM
KH-USB-AM-2712		0755-83044319		(Scale) 1:1
(Commodity) : USB-A male (long) solder-type (flat)				ANGLE OF PROJECTION
(CHECKED):		(REV):	A/0	Tolerance Unspecified XX ± 0.30 XXX ± 0.20 XXXX ± 0.10 X° ±5° XX° '2"
(DESIGN):	Zhu Shihui	(DATE):	2011/1/5	