
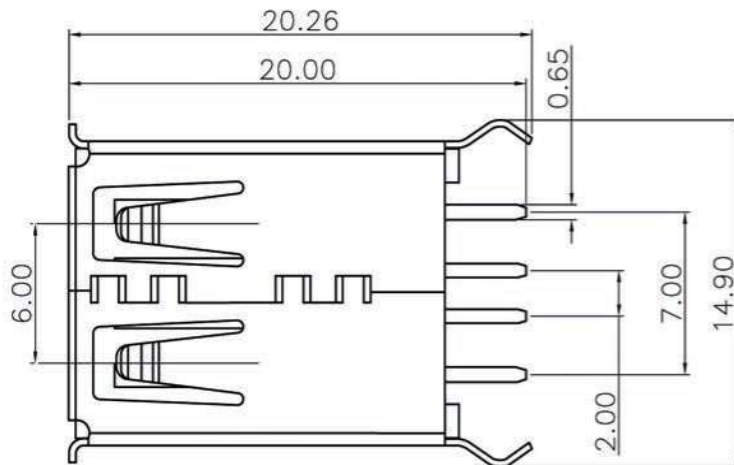
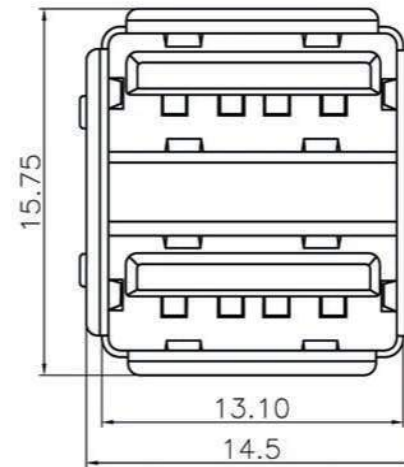


Kinghelm®

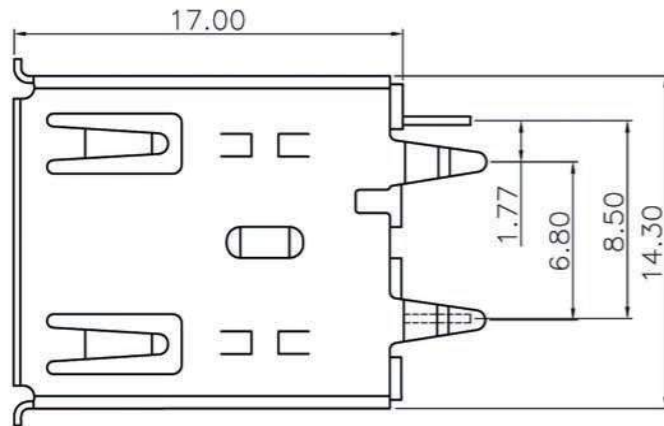

Remark

Electrical Specifications:

Contact Resistance:

30 mΩ (Max))

Insulation Impedance:

1000 MΩ (Min)

Withstanding Voltage:

500V AC 1minute

Materials:

Rubber Core:

PBT

Terminal:

Brass C2680

Housing:

Brass C2680/SPCC

Electroplating:

Terminal:

Contact area gold-plating 1 μ",

Tin flash in Soldering area 100-200μ"

Housing:

Whole-area nickel plating 50-80 μ"

91-US01-XXX

231: PBT Black, Iron housing, Semi-gold-plated Terminal


232: PBT Black, Copper housing, Semi-gold-plated Terminal

233: PBT White, Iron housing, Semi-gold-plated Terminal

234: PBT White, Copper housing, Semi-gold-plated Terminal

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.XXX	±0.10
.XX	±0.20
.X	±0.30
.X'	±3'

Part name	AF Bilayer 180-degree Dip (Long)		
Part No.	See Table		C
SHENZHEN KINGHELM ELECTRONIC CO., LTD.		WWW.BDS666.COM	
KH-2AF180DIP-1715		0755-83044319	

REV:	DESCRIPTION	REV BY	APPROVED	DATE	MATL:	SEE SPECIFICATION			APPROVED
B	update part No.	ZouJianhui		2011. 05. 28	PROJECTION:	 THIRD ANGLE PROJECTION			CHECKED
					UNIT:	SCALE	REV(NO)	SHEET	DRAWN
					mm	1:1	B	1 OF 1	DATE