
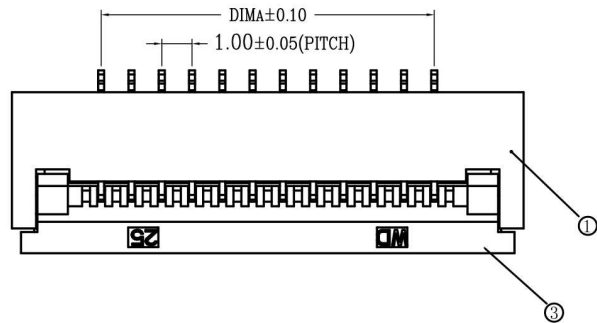


SECTION A-A

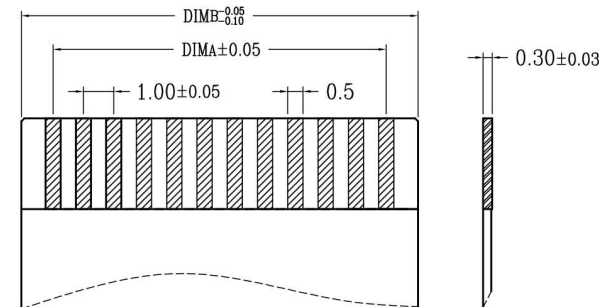

## Technical Specifications:

1. The surface of plastic parts shall be smooth without burrs and obvious shrinkage, defects, cracks, etc.
2. Temperature Range: - 25 ° C ~ 85 ° C
3. Rated Voltage: 50V, AC/DC (Equivalent).
4. Contact Resistance:  $\leq 0.03\Omega$ .
5. Insulation Resistance:  $\geq 500M\Omega$
6. material number:

XW10202-\*\*-\*\*-\*\*


NO OF CKT (Item Pin)

Plating  
0: Fully Tin-plated Terminal  
1: Fully Gold-plated Terminal (G/F OVERALL)  
5: Semi-Gold-Tin-Plated Terminal

Packaging  
T: Tube Packing  
R: TAPE & REEL Packing

00 后盖有LOGO:WD  
0W 后盖无LOGO

## Applicable Circuit Board

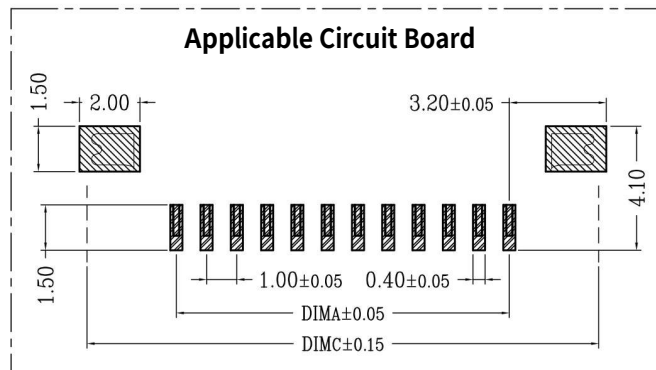

## Applicable Flat Wire

|                                                            |  |                |  |
|------------------------------------------------------------|--|----------------|--|
| SHENZHEN KINGHELM ELECTRONIC CO., LTD                      |  | WWW.BDS666.COM |  |
| KH-FG1.0- -H2.0- 30PIN                                     |  | 0755-83044319  |  |
| TITLE                                                      |  | DR             |  |
| 0.5 Pitch Third-generation ZIF R/A Upper Connector (H=2.0) |  | Anlan          |  |
| DWG NO.                                                    |  | CHKD           |  |
| X10202- ****-**-**                                         |  | Wang Tao       |  |
| Scale                                                      |  | APPD           |  |
| Unit                                                       |  | HUANG ZHIMING  |  |
| 1:1                                                        |  | SHEET          |  |
| mm                                                         |  | SIZE           |  |
|                                                            |  | 1 OF 1         |  |
|                                                            |  | REV            |  |
|                                                            |  | 1              |  |