

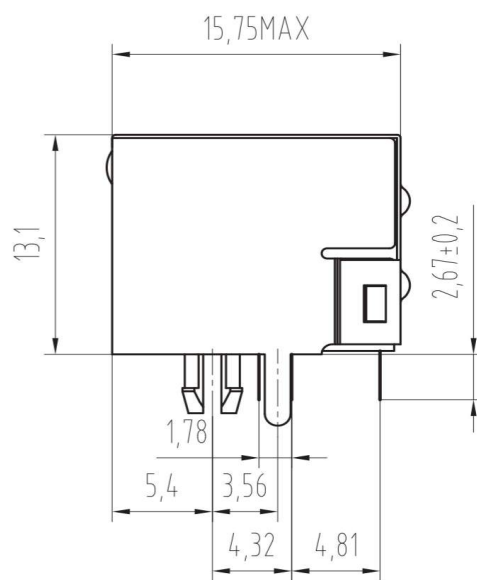


Model: KH-RJ45-56-8P8C-D

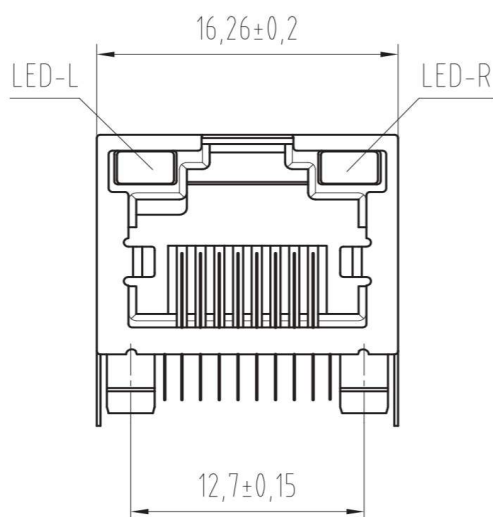

Main parameters:

1. Rated Voltage:, Rated Current: 125V/1.5A max
2. Contact Resistance: 40mΩMax Initial state : 100mΩ Max Final state
3. Insulation Resistance: 500MΩMin
4. Dielectric Withstand Voltage Test: AC500V/5.0mA for 1 minute
5. salt spray test: 8±0.5H

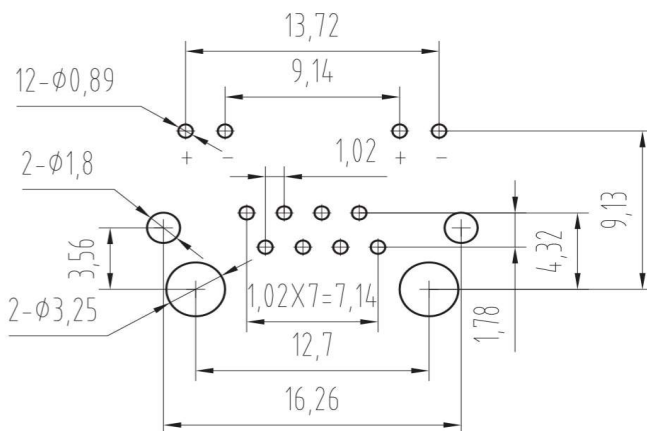

PC Board Layout

Component Side Shown

D		LED LAMP	YELLOW/GREEN		
C		Signal pin	Phosphor Bronze	Tin-gold	
B		Housing	Copper Housing	Tin-pating	
A		Core	PA66	Black	
No.	Materials No.	Designation	Materials	Electroplating/color	Remarks

					Visual Angle	Unspecified Tolerance	X. ±0.30 .X ±0.20 .XX ±0.15 XXX ±0.05	X° ±2° .X° ±1° XX° ±0.5°	WN
Marking	Number of Revised	Revised Document Number	Signature	Date	Visual Angle	Unspecified Tolerance	X. ±0.30 .X ±0.20 .XX ±0.15 XXX ±0.05	X° ±2° .X° ±1° XX° ±0.5°	WN
Designed		Xiao Changhong			Drawing	Mark	Weinght	scale	Model: :KH-RJ45-56-8P8C-D
Checked		Tang Yuanlin							
Technics					1 Page in Total		Page 1		
Standardized					SHENZHEN KINGHELM ELECTRONIC				WWW.BDS666.COM
Approved		Tang Ping			CO., LTD.				0755-83044319