
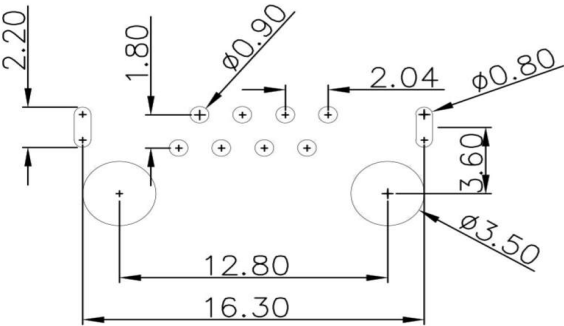
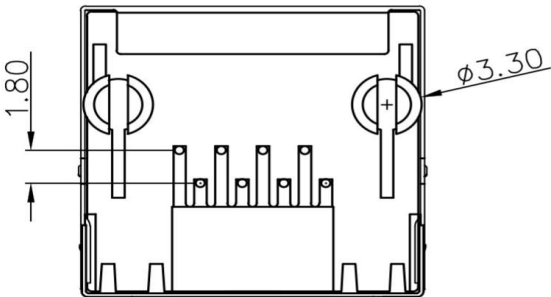

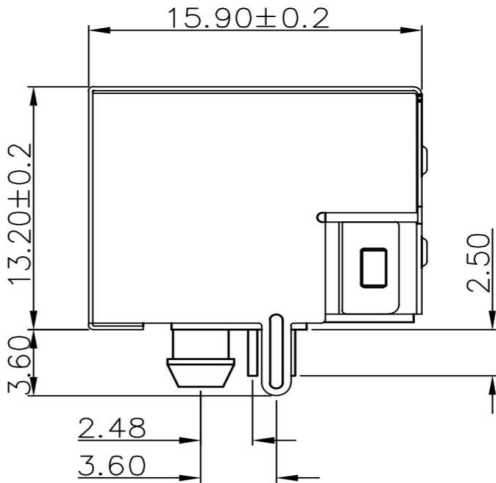


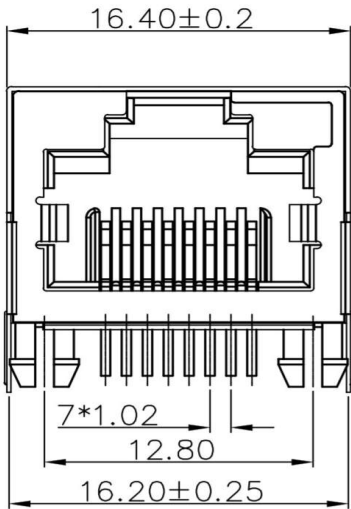

PCB

Technical Characteristics:

- 1: Rated Voltage, Rated Current: 125V/1.5A Max
- 2: Contact Resistance: 40mΩ Max Initial state
100mΩ Max Final state
- 3: Insulation Resistance 500MΩ Min
- 4: Dielectric Withstand Voltage Test: AC 500V
- 5: salt spray test: 8H
- 6: Welding temperature: 260±5° C 3±0.5S

TZXXXXXXXXXXXX

Code of End Product

Product Status

1. Raw Materials 2. End Product
3. Plastic Parts 4. Hardware 5. Semi-finished Products

Product category

1. HDMI 2. Jack 3. USB 4. RJ 5. DC

Product Subcategory

1. Plug-in Board 2. SMT Pick and Place 3. Plastic Parts 4. Hardware

Housing Material

1. Iron housing 2. Copper housing 3. Stainless Steel

Housing Electroplating

1. Nickel-Plating 12H 2. Nickel-Plating 24H
3. Nickel-Plating 24H
4. Gold-Plating 0.5U" 5. Gold-Plating 1U"

Serial Number

Package

1. PE Bag 2. Suction Cup 3. Bagging
4. Tube Packing

Color

1. White 2. Black 3. red 4. Yellow
5. Blue 6. Green 7. Grey

Plastic Material

1. PBT 2. LCP 3. PA6T 4. PA9T 5. PA46

Terminal Plating

1. All-tin Plating 2. Gold-Plating 0.5U" 3. Gold-Plating 1U"
4. Gold-Plating 3U" 5. Gold-Plating 5U" 6. Gold-Plating 15U"

Terminal Material

1. Copper wire 2. Brass 3. Phosphor Bronze 4. Others

C	/	PINS	Phosphor Bronze	ø0.45	Gold-pating	
B	/	Base		PBT	Black	
A	/	Shielding shell		Brass	Nickel-Plating	
Serial Number	Materials P/N	Designation	Materials	Electroplating/color	Rmarks	

					Visual Angle 	Unspecified Tolerance $X. \pm 0.30$ $.X \pm 0.20$ $.XX \pm 0.15$ $XXX \pm 0.05$	$X^{\circ} \pm 2^{\circ}$ $.X^{\circ} \pm 1^{\circ}$ $XX^{\circ} \pm 0.5^{\circ}$	
Marking	Number of Revised	Revised Document Number	Signature	Date				
Designed	-	yang			Drawing	Mark	Weight	Scale
Checked		Tang Yuanlin						
Technics					1 Page in Total		Page	
Standardization					Model: KHRJ45-56-8P8C Copper Housing			
Approval	:	Tang Ping						

SHENZHEN KINGHELM ELECTRONIC CO., LTD.

WWW.BDS666.COM

0755-83044319