
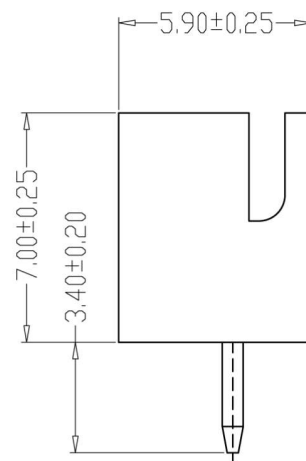
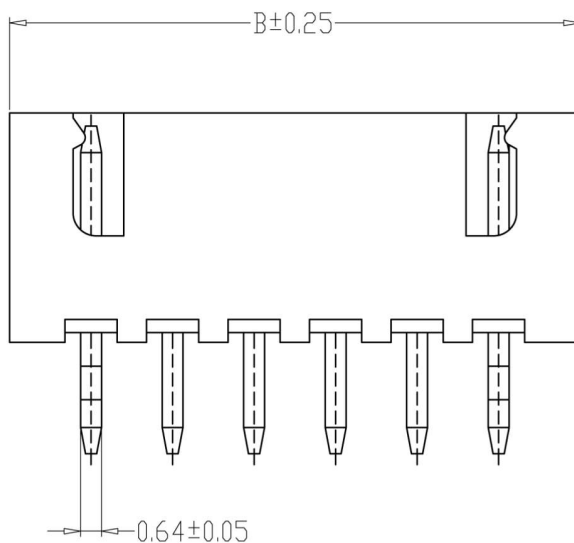
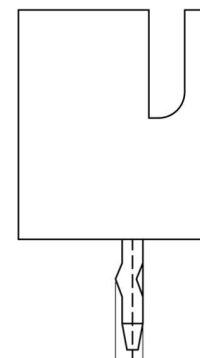
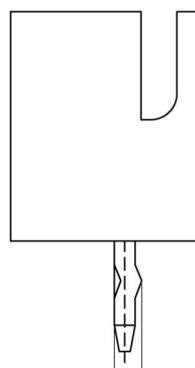
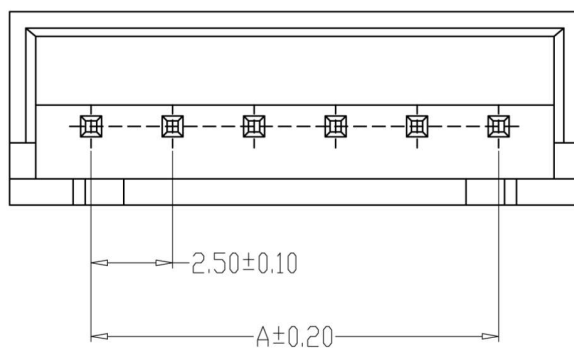


Model: KH-XH- (2-10) A-Z

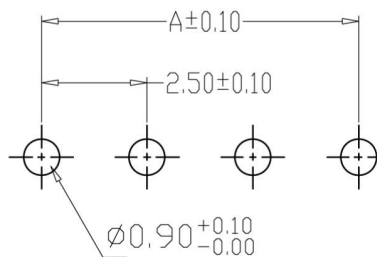

TYPE 1

 0.80 ± 0.20  $0,80 \pm 0,20$ 

PCB LAYOUT

SPECIFICATIONS

1. Current Rating: 3A AC, DC
2. Voltage Rating: 250V AC, DC
3. Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
4. Contact Resistance: $20\text{m}\Omega$ Max
5. Insulation Resistance: $1000\text{M}\Omega$ Min
6. Withstanding Voltage: 1000V AC/minute
7. Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

No.	Unit (mm)	
	A	B
A2501-02A	2. 50	7. 50
A2501-03A	5. 00	10. 00
A2501-04A	7. 50	12. 50
A2501-05A	10. 00	15. 00
A2501-06A	12. 50	17. 50
A2501-07A	15. 00	20. 00
A2501-08A	17. 50	22. 50
A2501-09A	20. 00	25. 00
A2501-10A	22. 50	27. 50
A2501-11A	25. 00	30. 00
A2501-12A	27. 50	32. 50
A2501-20A	47. 50	52. 50

DRAWN	DESCRIPTION	DATE	GENERAL TOLERANCE		DRAWN				PART NO.	A2501-NA	REV.	A
			X.±0.25	X.±2°	CHECKED	2013、07、01		TITLE	WAFER DIP TYPE	SHEET	1/1	
			.X±0.20	.X'±1°		2013、07、03		CUTM. NO.	KH-XH-10A-Z			
			.XX±0.15	.XX'±0.5°	APPROVED	2013、07、05		SHENZHEN KINGHELM ELECTRONIC CO., LTD.				
			.XXX±0.10	.XXX'±0.5°		UNITS	MM	SCALE	1:1	WWW.BDS666.COM	0755-83044319	