

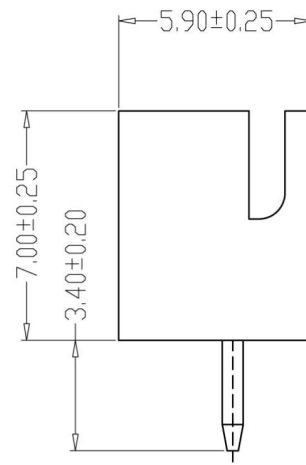


Kinghelm®



Model: KH-XH- (2-10) A-Z

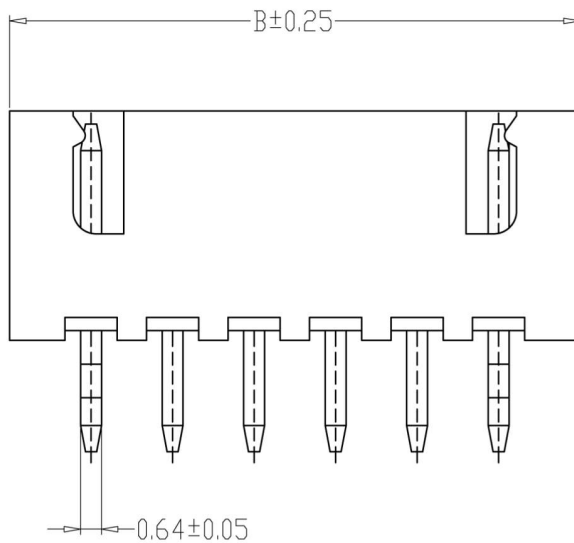


TYPE 1

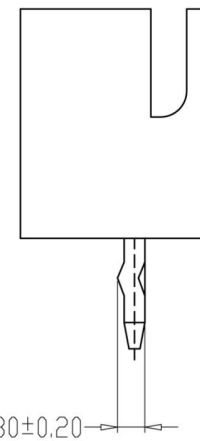

TYPE 2

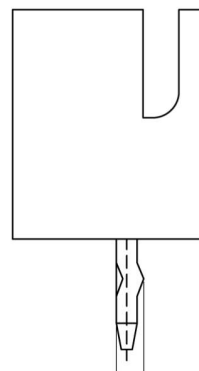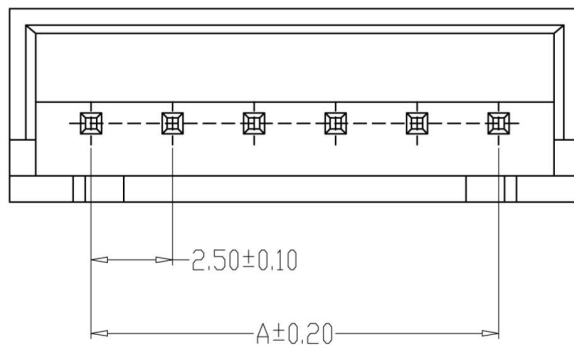

TYPE 3

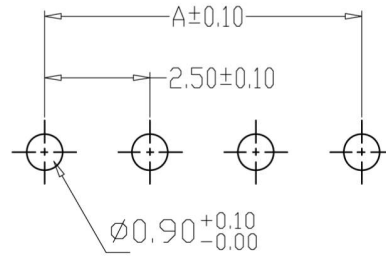

PCB LAYOUT

SPECIFICATIONS

1. Current Rating: 3A AC, DC
2. Voltage Rating: 250V AC, DC
3. Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
4. Contact Resistance: $20\text{m}\Omega$ Max
5. Insulation Resistance: $1000\text{M}\Omega$ Min
6. Withstanding Voltage: 1000V AC/minute
7. Material: Wafer Nylon66, UL94V-0
- PIN Brass Tin-plated

No.	Unit (mm)	
	A	B
A2501-02A	2.50	7.50
A2501-03A	5.00	10.00
A2501-04A	7.50	12.50
A2501-05A	10.00	15.00
A2501-06A	12.50	17.50
A2501-07A	15.00	20.00
A2501-08A	17.50	22.50
A2501-09A	20.00	25.00
A2501-10A	22.50	27.50
A2501-11A	25.00	30.00
A2501-12A	27.50	32.50
A2501-20A	47.50	52.50

DRAWN	DESCRIPTION	DATE	GENERAL TOLERANCE		DRAWN	2013、07、01		PART NO.	A2501-NA		REV.	A					
			X.±0.25	X.*±2°													
			.X±0.20	.X*±1°													
			.XX±0.15	.XX*±0.5°													
			.XXX±0.10	.XXX*±0.5°													
					CHECKED	2013、07、03		TITLE	WAFER DIP TYPE		SHEET	1/1					
													KH-XH-4A-Z				
													SHENZHEN KINGHELM ELECTRONIC CO., LTD.				
					APPROVED	2013、07、05		CUTM. NO.									
									WWW.BDS666.COM								
					UNITS	MM	SCALE	1:1	WWW.BDS666.COM		0755-83044319						