
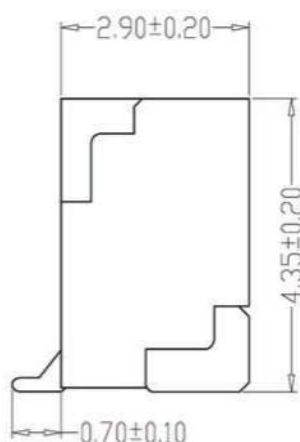
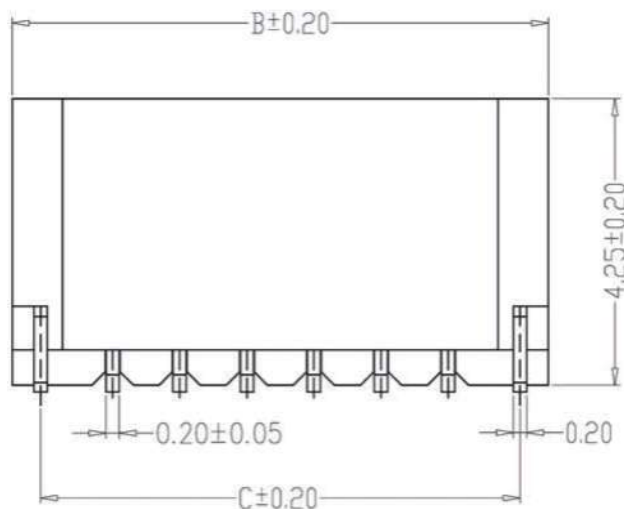
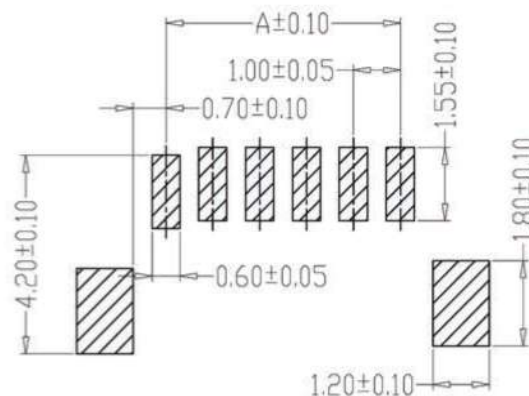


Model: KH-A1001LF- (02-20) A

SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 50V AC, DC
- 3、Temperatuer Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $100\text{M}\Omega$ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material: Wafer Nylon 6T, UL94V-0
PIN Phosphoric bronze Tin-plated
Solder tad Phosphoric bronze Tin-plated

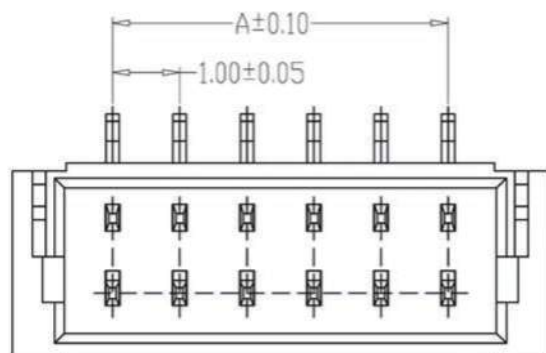

PCB LAYOUT

NO.	mm		
	A	B	C
A1001LF-02A	1.00	4.00	3.20
A1001LF-03A	2.00	5.00	4.20
A1001LF-04A	3.00	6.00	5.20
A1001LF-05A	4.00	7.00	6.20
A1001LF-06A	5.00	8.00	7.20
A1001LF-07A	6.00	9.00	8.20
A1001LF-08A	7.00	10.00	9.20
A1001LF-09A	8.00	11.00	10.20
A1001LF-10A	9.00	12.00	11.20
A1001LF-11A	10.00	13.00	12.20
A1001LF-12A	11.00	14.00	13.20
A1001LF-20A	19.00	22.00	21.20

DRAWN	DESCRIPTION	DATE	GENERAL TOLERANCE		DRAWING	HE JUNJU 2013、07、01	PART NO.			REV.	A
			X. ± 0.25	X. $^{\circ} \pm 2^{\circ}$	CHECK	LAI JIREN 2013、07、03	TITLE	1.0 DIP WAFE SMT TYPE		SHEET	1/1
			.X ± 0.20	.X $^{\circ} \pm 1^{\circ}$	APPROVAL	ZHANG SONGQIANG 2013、07、05	CUTM. NO.				
			.XX ± 0.15	.XX $^{\circ} \pm 0.5^{\circ}$	UNITS	MM	SCALE	1:1	SHENZHEN KINGHELM ELECTRONIC CO., LTD.		WWW.BDS666.COM
			.XXX ± 0.10	.XXX $^{\circ} \pm 0.5^{\circ}$			KH-A1001LF-06A		0755-83044319		