
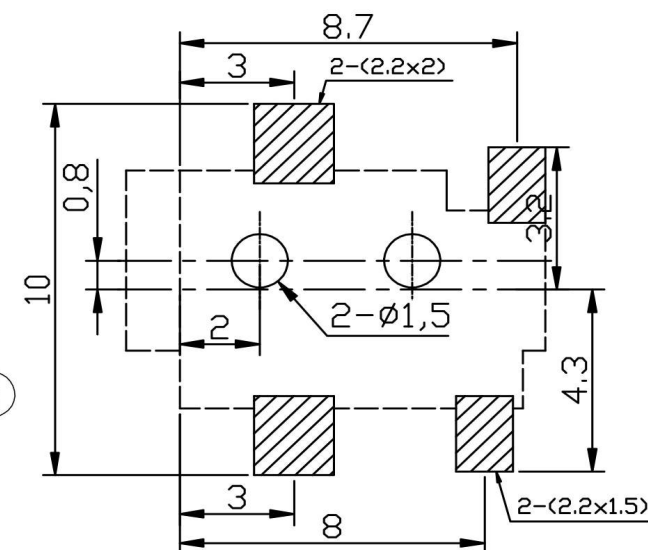
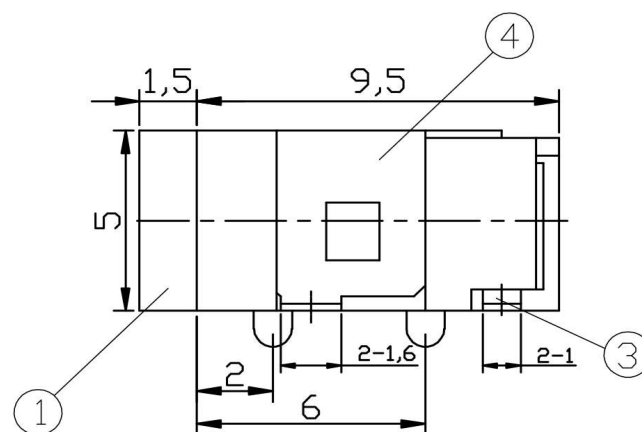


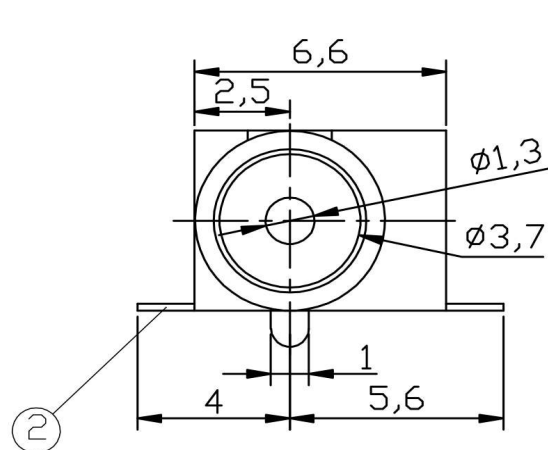

Technical Specifications

Operation Condition: - 40 ~ 55°C

Rated Load: DC 30V 0 SA

Contact Resistance: ≤ 0.03


Insulation Resistance: $\geq 100M\Omega$ DC250V

Withstand Voltage: AC 500V (50Hz)/min

Insertion-withdrawal Force: 3~20N

Mechanical Life: 5000 times

Schematic of PCB



4		Grounding Piece	IPCS	Brass t=0.25	Electroplating: Silver
3		Reed	IPCS	Brass t=0.26	Electroplating: Silver
2		Contact Pin	IPCS	H62Brass Strip t = 0.20	Electroplating: Silver
1		Base	IPCS	PA66(Black)	
Serial Number	Part Number or Code	Quantity	IPCS	Materials	Remark

					SHEN ZHEN KINGHELM ELECTRONIC CO., LTD.			WWW.BDS666.COM		
Revised Order Number					KH-DC-031A-1.0STM			0755-83044319		
Mark	Number of Revised	Change of Document Number	Signature	Date	DC-0131A			Drawing Mark	Weight	Scale
Drawn								A B		1:1
Designed					Electrical Socket			1 Page in Total		
Checked								Page 1		
Craft										
Standardized										
Approved										

TOLERANCE: UNLESS OTHERWISE SPECIFIED

UNOER 1.5±0.05 | 1.5~10±0.1 | OVER 10±0.2