


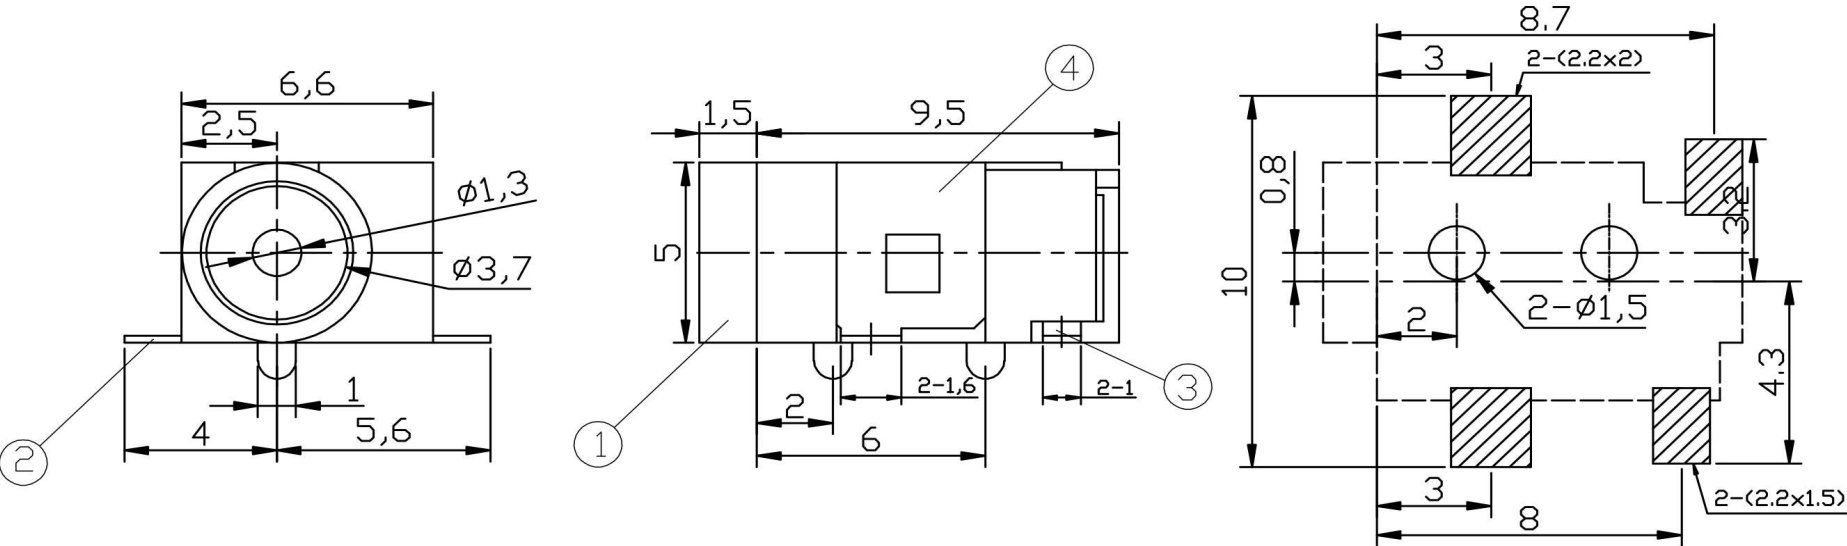

Technical Specifications	
Operation Condition:	- 40 ~ 55°C
Rating:	DC 30V 0.5A
Contact Resistance:	≤ 0.03
Insulation Resistance:	≥ 100MΩ DC250V
Withstand Voltage:	AC 500V (50Hz)/min
Insertion-withdrawal Force:	3~20N
Mechanical Life:	5000 times

Schematic of PCB

	3		Reed	IPCS	Brass t=0.26	Electroplating: Silver
	2		Contact Pin	IPCS	H62Brass Strip t = 0.20	Electroplating: Silver
	1		Base	IPCS	PA66(Black)	
	Serial No.	Part Number or Code	Quantity	IPCS	Materials	Remark

					SHEN ZHEN KINGHELM ELECTRONIC CO., LTD.	WWW.BDS666.COM			
						KH-DC-031A-1.3STM	0755-83044319		
Mark	Number of Revised	Revised Document Number	Signature	Date					
Drawn					DC-0131A	Drawing Mark	Weight	Scale	
Designed						A	B	1:1	
Checked						1 Page in Total Page 1			
Craft					Electrical Socket				
Standardized									
Approved									

TOLERANCE: UNLESS OTHERWISE SPECIFIED		
UNOER 1.5±0.05	1.5~10±0.1	OVER 10±0.2