

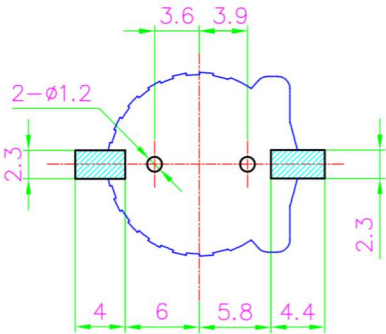
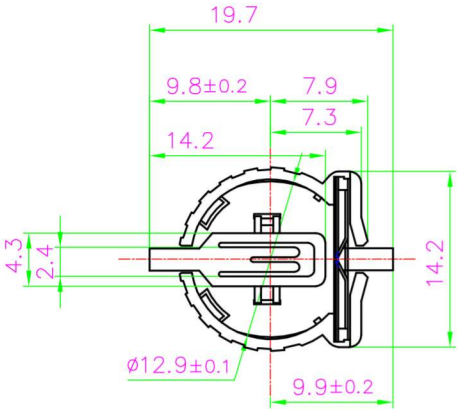


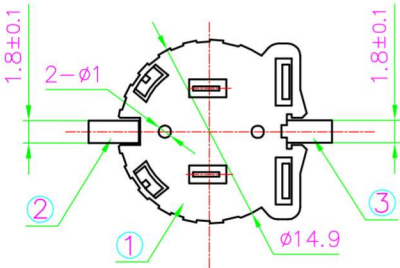

PCB Holes Diagram
Top View



Main specification:

- 1. Contact resistance: 30mΩ min.
- 2.Insulation resistance: 1000MΩ max.
- 3.Withstand voltage: 500V AC for 1 minute.

ORDERING INFORMATION

BS-12-A**0*002

电池座系列
BS-12系列
SMT 180° TYPE

PLATING:
J-Au1U”
K-Au30U”

MATERIAL:
1A-PBT WHITE
1B-PBT BLACK
2A-PPS WHITE
2B-PPS BLACK
3A-PPA WHITE
3B-PPA BROWN

CRUST:
O-WITHOUT

注: ▼为重点管控尺寸

TOLERANCE		Tolerance:Unless otherwise specified			
LINEAR	ANGLE	3	TERMINAL-2	QSn6.5-0.2	Au-Plated
		2	TERMINAL-1	QSn6.5-0.2	Au-Plated
		1	HOUSING	PPA	BROWN
		NO.	PART NAME	MATERIAL	COLOR/FINISHED
x. ±1	x.° ±5'				
.x ±0.38	.x.° ±2'				
.xx ±0.25	.xx.° ±1'				
.xxx ±0.10					

深圳市金航标电子有限公司

www.kinghelm.com.cn

日期DATE 单位UNITS 审核CHECK

2009.1.28

mm

BATTERY HDLDER

PART NO.

BS-12-A3B0J002

KH-BS1220-2

0755-28190160

比例SCALE 制图DRAW 设计DESIGN

1/1

TITLE:

两PIN电池座卧式SMT (BS-1220-2)