


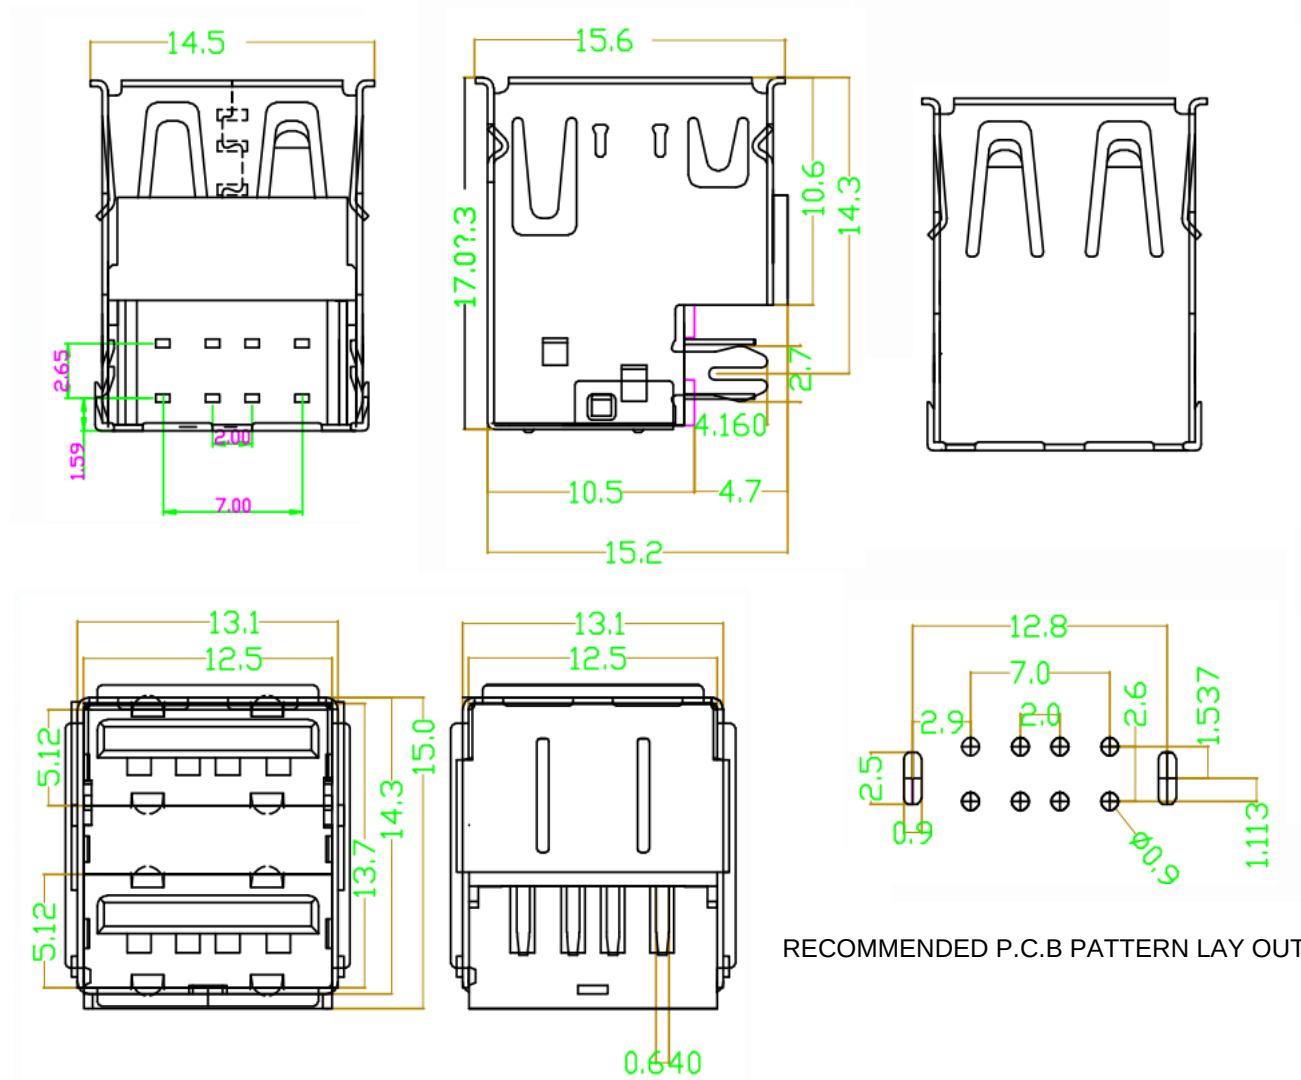

Rounded Edge

Characteristics :

1. Rated Current: 1.5 AMP at 250V AC
Rated Voltage: 30V
2. Insulation Resistance: Minimum 1000MΩ
3. Contact Resistance: Maximum 30mΩ
4. Withstanding Voltage Strength: 500V AC
5. Temperature Range: -20°C~60°C
6. Insertion Force: ≤35N
7. Extraction Force: ≥10N

Remarks :

1. There must not be loose, deformation phenomenon.
2. Pin must not be bent or deformed.
3. Environmental requirements : EU environmental protection
4. With "△" for the first piece of inspection size
5. With "▲" for the first piece and process inspection size

RECOMMENDED P.C.B PATTERN LAY OUT

Manufacture DWG		Shenzhen Kinghelm Electronics Co., Ltd					www.kinghelm.net			
Tolerance Unless Otherwise		KH-2AF90CB-17JB					0755-83044319			
.X±0.15	X.±5'	Date	Date	Unit	MM	Drawing	Drawing	DWG No.	DWG NO.	
.XX±0.05	.X±2°	Checked	Checked	Scale	1:1	Design	Design	Name	Double layer sinker 10.5 straight edge	
.XXX±0.02	XX±1'	Approved	Approved	View	⊕ ⊖			Ver	Ver	Sheet PG1