


Kinghelm®

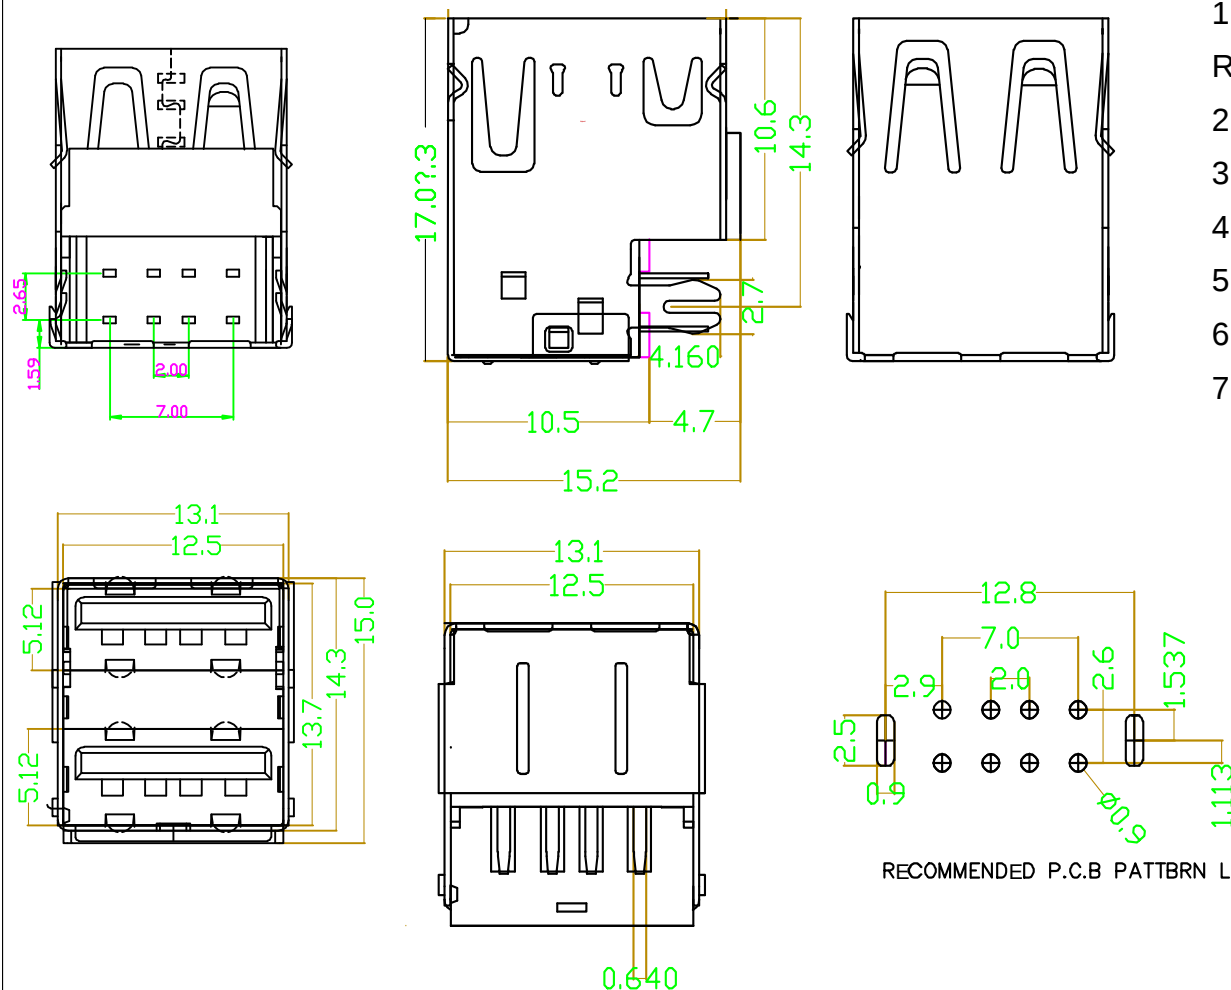

Characteristics:

1. Rated Current: 1.5 AMP at 250V AC
2. Rated Voltage: 30V
3. Insulation Resistance: Minimum 1000MΩ
4. Contact Resistance: Maximum 30mΩ
5. Withstanding Voltage Strength: 500V AC
6. Temperature Range: -20 ~60℃
7. Insertion Force ≤35N
8. Extraction Force ≥10N

Remarks:

1. There must not be loose, deformation phenomenon.
2. Pin must not be bent or deformed.
3. Environmental requirements: EU environmental protection
4. With "△" for the first piece of inspection size
5. With "▲" for the first piece and process inspection size

Straight Edge

Manufacture DWG		Shenzhen Kinghelm Electronics Co., Ltd					www.kinghelm.net			
Tolerance Unless Otherwise		KH-2AF90CB-17					0755-83044319			
.X±0.15	.X±5'	Date	DATE	Unit	MM	Drawing	Drawing	DWG No.	DWGNO.	
XX±0.05	.X±2'	Checked	Checked	Scale	1 : 1	Design	Design	Name	Double layer sinker 10.5 straight edge	
XXX±0.02	.XX±1'	Approved	Approved	View	⊕			Ver	VER	Sheet PG1