
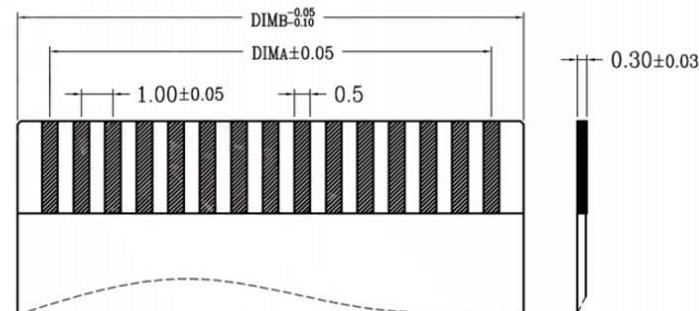

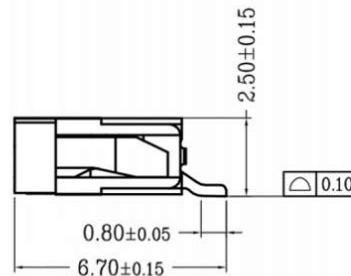
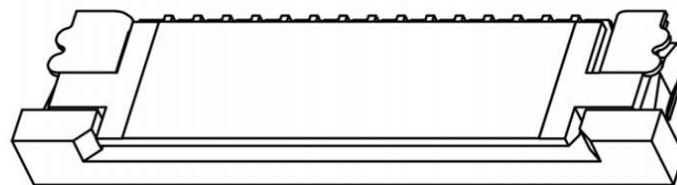
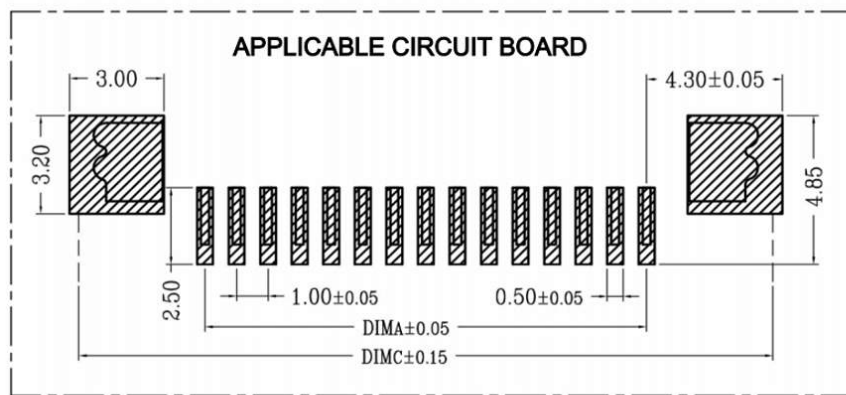
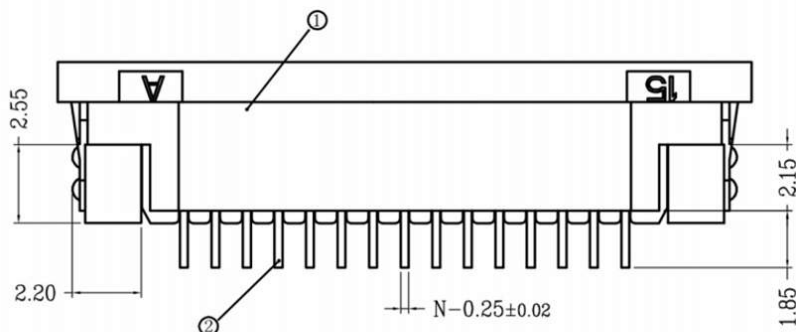
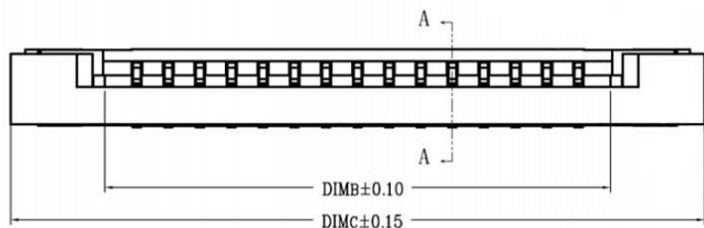


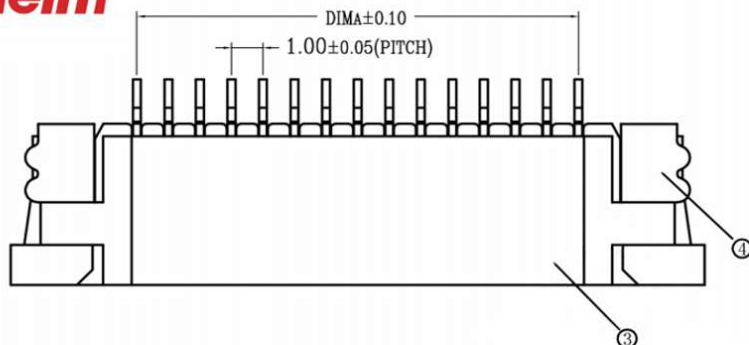

**SUITABLE FLAT LINE**

**Specification:**

1. The surface of the plastic parts should be smooth, hairless, no obvious shrinkage defects, cracks and other phenomena.
2. Temperature Range: -25°C~85°C
3. Rated Voltage: 50V, AC/DC (Equivalent)
4. Contact Resistance:  $\leq 0.03\Omega$
5. Insulation Resistance:  $\geq 500M\Omega$

| TOLERANCE |          |
|-----------|----------|
| X.±.50    | .XX±.10  |
| .X±.20    | .XXX±.05 |
| ANGLE     | ±1°      |

| NO. | TITLE                              | MATERIAL                                |
|-----|------------------------------------|-----------------------------------------|
| ①   | 1.0 Type K Rubber Core(H2.5)       | LCP UL94V-0 True Colour                 |
| ②   | 1.0 Type K Upper Terminal(H2.5)    | Phosphorus Bronze / Surface Tin Plating |
| ③   | 1.0 Type K Back Cover(H2.5)        | LCP UL94V-0Black                        |
| ④   | 1.0 Type K Horizontal Solder(H2.5) | Brass / Surface Tin Plating             |

| CKT | DIM A | DIM B | DIM C |
|-----|-------|-------|-------|
| 4   | 3.00  | 5.03  | 11.00 |
| 5   | 4.00  | 6.03  | 12.00 |
| 6   | 5.00  | 7.03  | 13.00 |
| 7   | 6.00  | 8.03  | 14.00 |
| 8   | 7.00  | 9.03  | 15.00 |
| 9   | 8.00  | 10.03 | 16.00 |
| 10  | 9.00  | 11.03 | 17.00 |
| 11  | 10.00 | 12.03 | 18.00 |
| 12  | 11.00 | 13.03 | 19.00 |
| 13  | 12.00 | 14.03 | 20.00 |
| 14  | 13.00 | 15.03 | 21.00 |
| 15  | 14.00 | 16.03 | 22.00 |
| 16  | 15.00 | 17.03 | 23.00 |
| 17  | 16.00 | 18.03 | 24.00 |
| 18  | 17.00 | 19.03 | 25.00 |
| 19  | 18.00 | 20.03 | 26.00 |
| 20  | 19.00 | 21.03 | 27.00 |
| 21  | 20.00 | 22.03 | 28.00 |
| 22  | 21.00 | 23.03 | 29.00 |
| 23  | 22.00 | 24.03 | 30.00 |
| 24  | 23.00 | 25.03 | 31.00 |
| 25  | 24.00 | 26.03 | 32.00 |
| 26  | 25.00 | 27.03 | 33.00 |
| 27  | 26.00 | 28.03 | 34.00 |
| 28  | 27.00 | 29.03 | 35.00 |
| 29  | 28.00 | 30.03 | 36.00 |
| 30  | 29.00 | 31.03 | 37.00 |
| 31  | 30.00 | 32.03 | 38.00 |
| 32  | 31.00 | 33.03 | 39.00 |
| 33  | 32.00 | 34.03 | 40.00 |
| 34  | 33.00 | 35.03 | 41.00 |
| 35  | 34.00 | 36.03 | 42.00 |
| 36  | 35.00 | 37.03 | 43.00 |
| 37  | 36.00 | 38.03 | 44.00 |
| 38  | 37.00 | 39.03 | 45.00 |
| 39  | 38.00 | 40.03 | 46.00 |
| 40  | 39.00 | 41.03 | 47.00 |

|                                        |                                                     |                  |              |
|----------------------------------------|-----------------------------------------------------|------------------|--------------|
| Shenzhen Kinghelm Electronics Co., Ltd |                                                     | www.kinghelm.net |              |
| KH-CL1.0-H2.5-25PS                     |                                                     | 0755-83044319    |              |
| TITLE                                  | 1.0 Pitch Type K Horizontal Upper Connection(H=2.5) |                  | DRAWING HJJ  |
| DWG.NO                                 | 2051-XXXX                                           |                  | CHECKED LZR  |
| SCALE                                  | 1:1                                                 | UNITS mm         | APPROVED DCK |
| SHEET 1 OF 1                           |                                                     | SIZE REV A4 1    |              |