


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

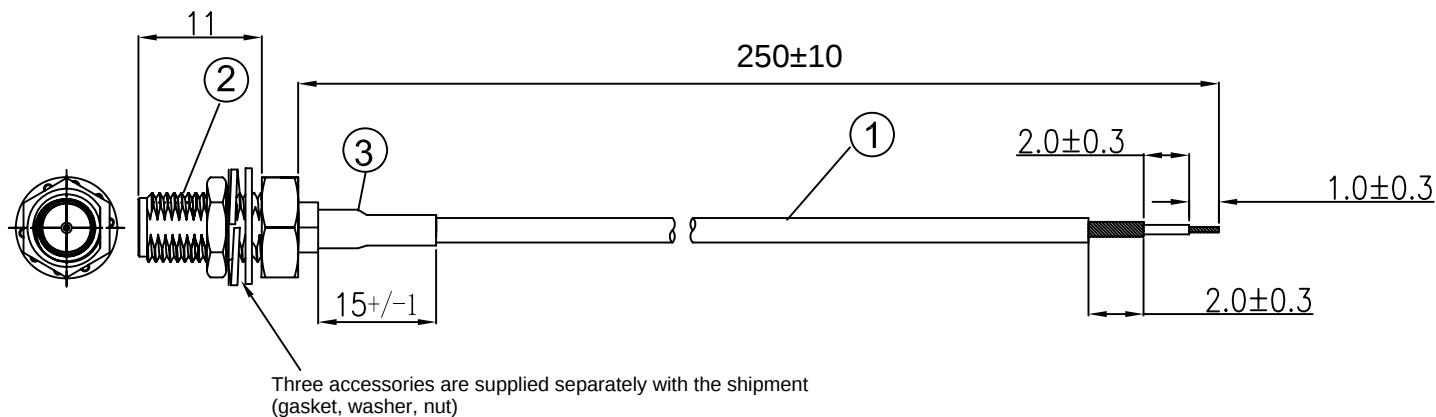

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
③	Sleeve	Black Heat Shrink Tube, OD: 2.0 mm	AS
②	Connector	SMA Female Connector with Female Pin, Detachable Type, 11 Threads, Gold-Plated	1
①	Coaxial Cable	RF 0.81 Black Cable, OD: 0.81 mm	AS

Shenzhen Kinghelm Electronics Co., Ltd.

Model : KH-122-081SMA-250

www.kinghelm.net

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2020-06-15	SMA /F TO OPEN L= 250MM	
	ENG.			
	MFG.			
	Q.A.			
COMPUTER GENERATED IN SOLIDWORKS				
DO NOT SCALE THIS DRAWING				
PROJECTION	GENERAL TOLERANCE FOR		SIZE B	REV A
	ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150			
CUSTOMER P/N:		SCALE: Free	TYPE	SHEET 1 OF 1