


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN	James		9/26

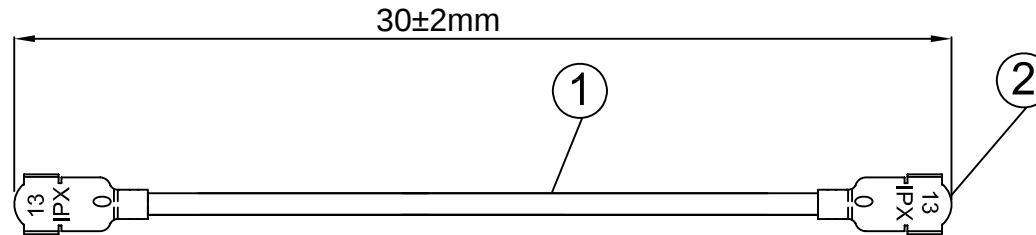

NOTES

1.ELECTRICAL

- 1.1. VOLTAGE RATING:DCV 300V 10MS
- 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
- 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
- 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
- 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.

2.MATERIAL


2.1. SEE TABLE

3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
②	TERMINAL	High imitation I-PEX 1.13 terminal, gold-plated	1
①	COAXIAL CABLE	RF1.13 gray coaxial cable, OD:1.13mm	AS

Shenzhen Kinghelm Electronics Co., Ltd www.kinghelm.net

KH(RG1.13)-TX30-IPEX

ALL DIMENSION ARE IN MM	DRAWN James	DATE 2019-06-01	TITLE I-PEX TO IPE-X		
	CHKD. Frank	2019-06-01			
	APPD. Scott	2019-06-01			
COMPUTER GENERATED IN SOLIDWORKS DO NOT SCALE THIS DRAWING			SIZE	DWG Number.	REV
PROJECTION 	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ±1° ±0.3 ±0.25 ±0.150		B		A
			SCALE:Free	TYPE	SHEET 1 OF 1