






Kinghelm®

REV.	DESCRIPTION	DRAWN/DATE	APPROVED/DATE

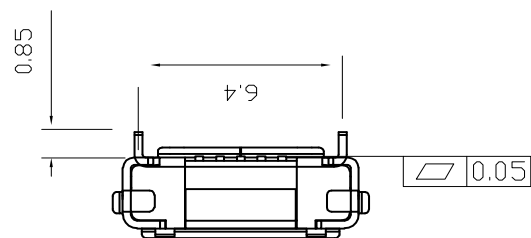

NOTES:

- MATERIAL:
 - HOUSING:THERMOPLASTIC FLAMMABILITY RATING UL94-0
 - CONTACT:COPPERY ALLOY T=0.15MM
 - SHELL: COPPERY ALLOY T=0.25MM
- FINISH:
 - CONTACT:
3U"MIN,PLATED ON CONTACT AREA
G/F PLATING ON SOLDER TAIL AREA
50~80U" NICKEL UNDERPLATING OVERALL
 - SHELL:
80~120U" MATTER TIN PLAING ALL
50~80U" NICKEL UNDERPLATING OVERALL
- SPECIFICATION:
 - CURRENT RATING:0.5A(2.3.4CONTACT)/1.8A (1.5CONTACT)MAX.
 - VOLTAGE:30 VAC
 - TEMPERATURE RANGE:-30°C~85°C
 - CONTACT RESISTANCE:30 MILLIONHM MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE;250VAC R.M.S
 - INSULATION RESISTNACE:100 MEGOHMS MIN

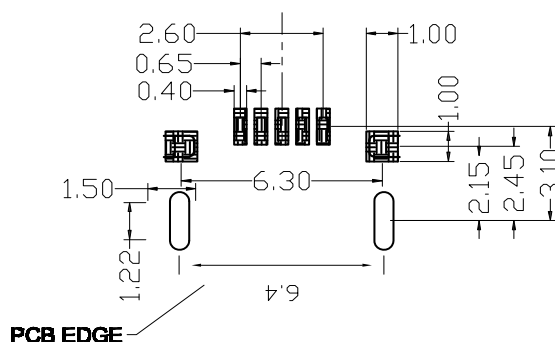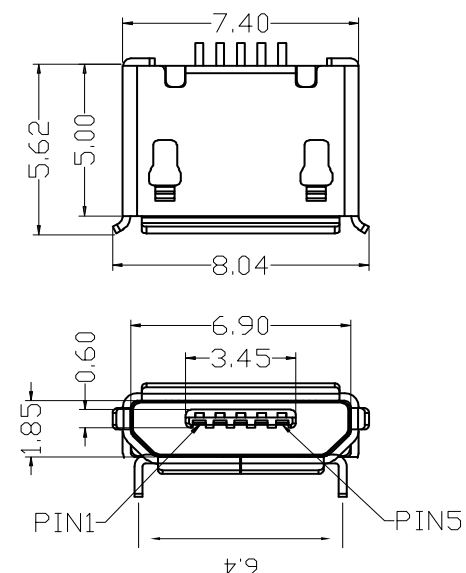

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	Shenzhen Kinghelm Electronics Co., Ltd.	
		ZQL		www.kinghelm.net	
X. ±0.35	X. ±2.0°	CHECK		KH-MICRO6.4H-5PJ	
.X ±0.25	.X ±1.0°	ZQL		FILE NAME(??)	MICRO USB 5PIN TYPE DIP SMT
.XX ±0.15	.XX ±0.5°	APPRO.		PART NO(??)	
.XXX ±0.10				DRAWING NO(??)	
UNIT:mm	SCALE 1:1				REV. A0
A4	SHEET: 1 of 1				