
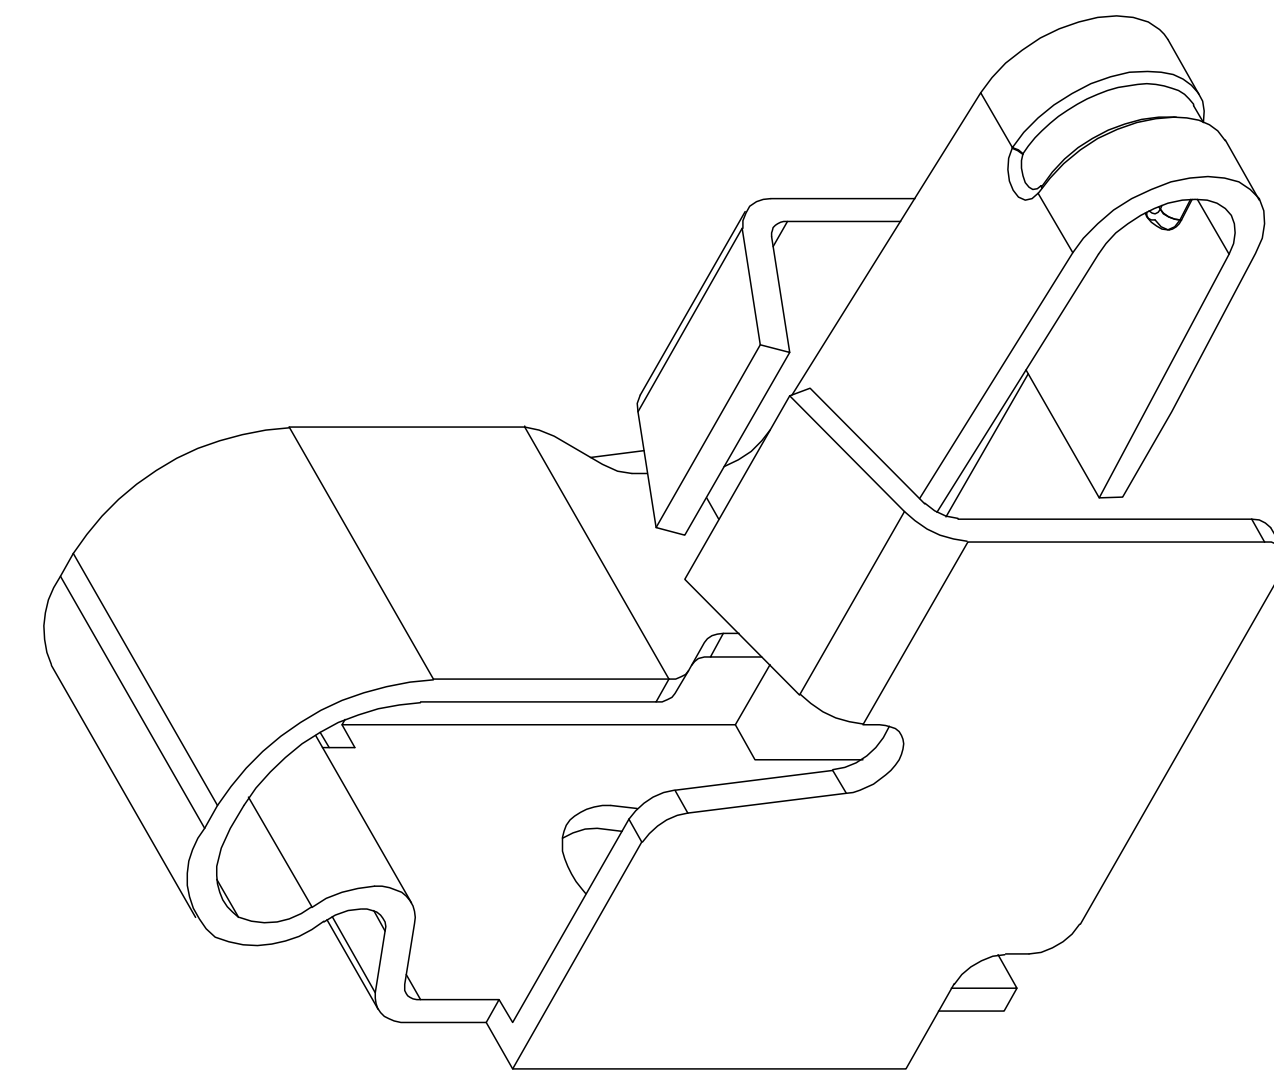
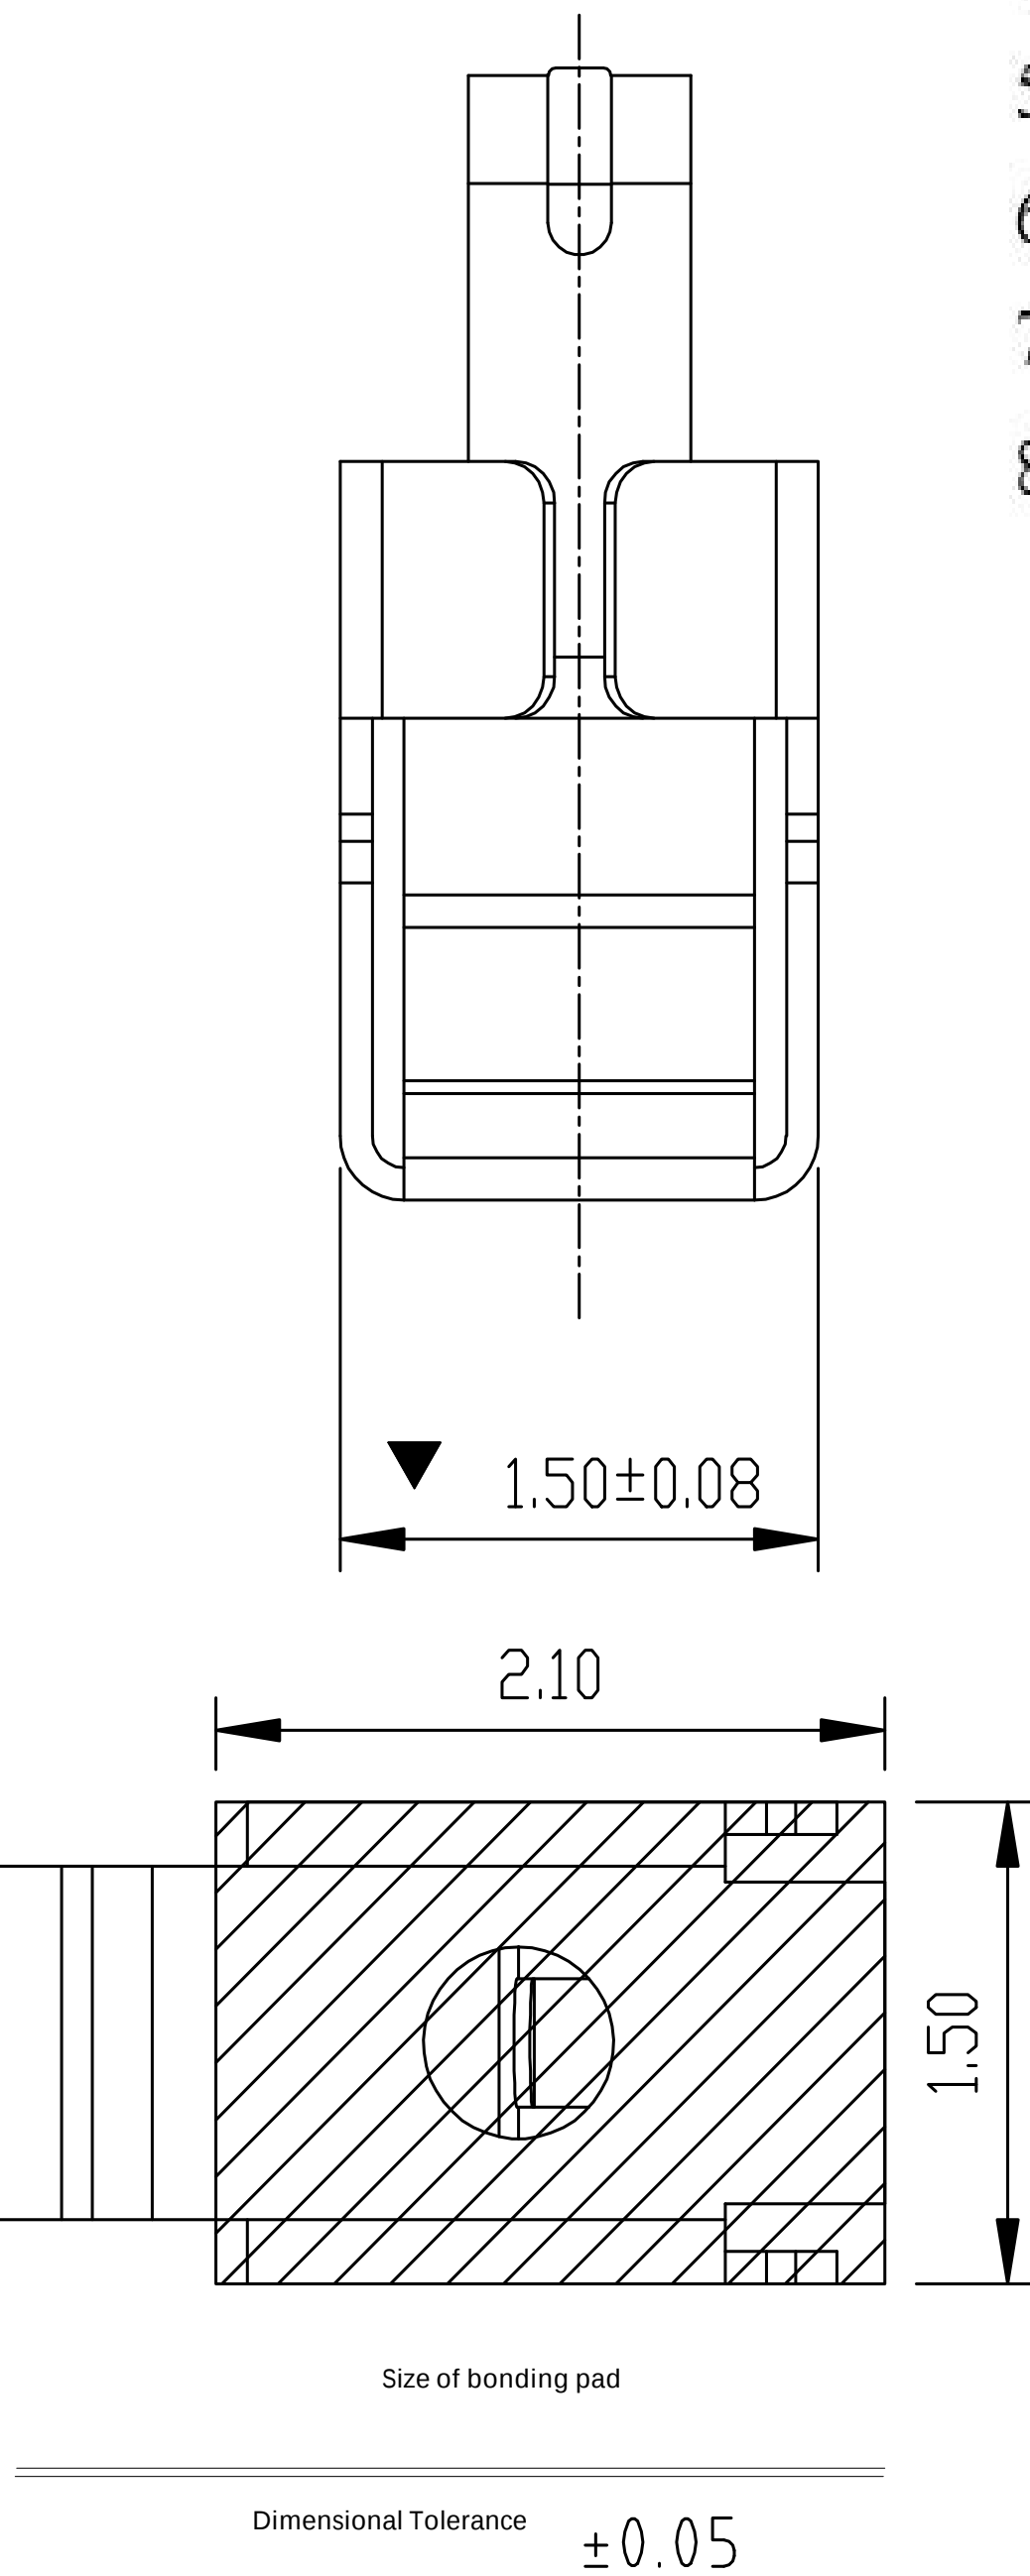


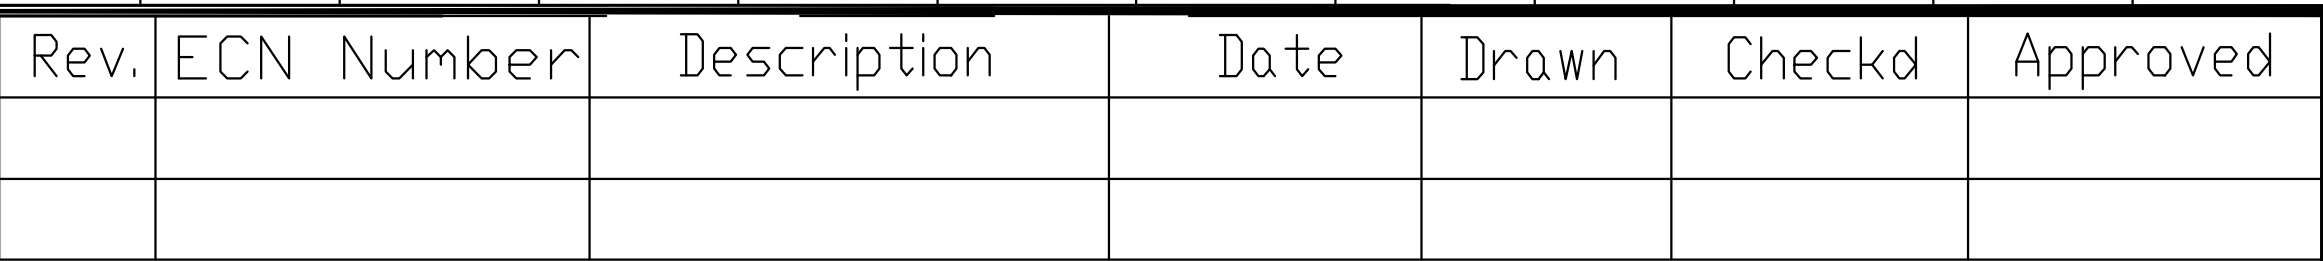

1. Material: stainless steel SUS304, $t = 0.10 \pm 0.005$;
- ▼ 2. The welding and contact surfaces of the Tin terminal shall be free of burrs, and the maximum size of burrs in other parts shall be 0.03mm;
3. Twisting: $45^\circ / 1000\text{mm}$, arch 5mm/1000mm;
4. Dimensions marked with "▼" shall be measured and inspected with emphasis;
5. Unmarked R Max R0.13;
6. Electroplating must be inspected by 48-hour salt spray test;
7. Life test > 20000 times The elasticity of the product shall be between 60gf and 80gf as required.
8. Ni 50~80u"min, soldering area gold-plating, contact area gold plating3U"MIN

Shenzhen Kinghelm Electronics Co., Ltd.	GENERAL TOLERANCE		SCALE: 1:1		DRAWN	DATE	DWG. NO.	TITLE Customer's drawing	REV.
www.kinghelm.net	XX. ±0.50		UNIT: mm		CHECK	DATE	681-0019A-1		A
KH-351535-TP	X. ±0.35		X.° ±2.0°	APPROVE	DATE	PARTS NO.(INTENDED USE) FDX0019A1	RF Antenna Spring,SMT, L3.5*W1.5*H3.5mm		SHEET 1/1
	.X ±0.25		.X° ±1.0°						
	.XX ±0.15	.XX° ±0.5°	SIZE: A4						